


C/L motor
CG
C/L motor
Main Wing

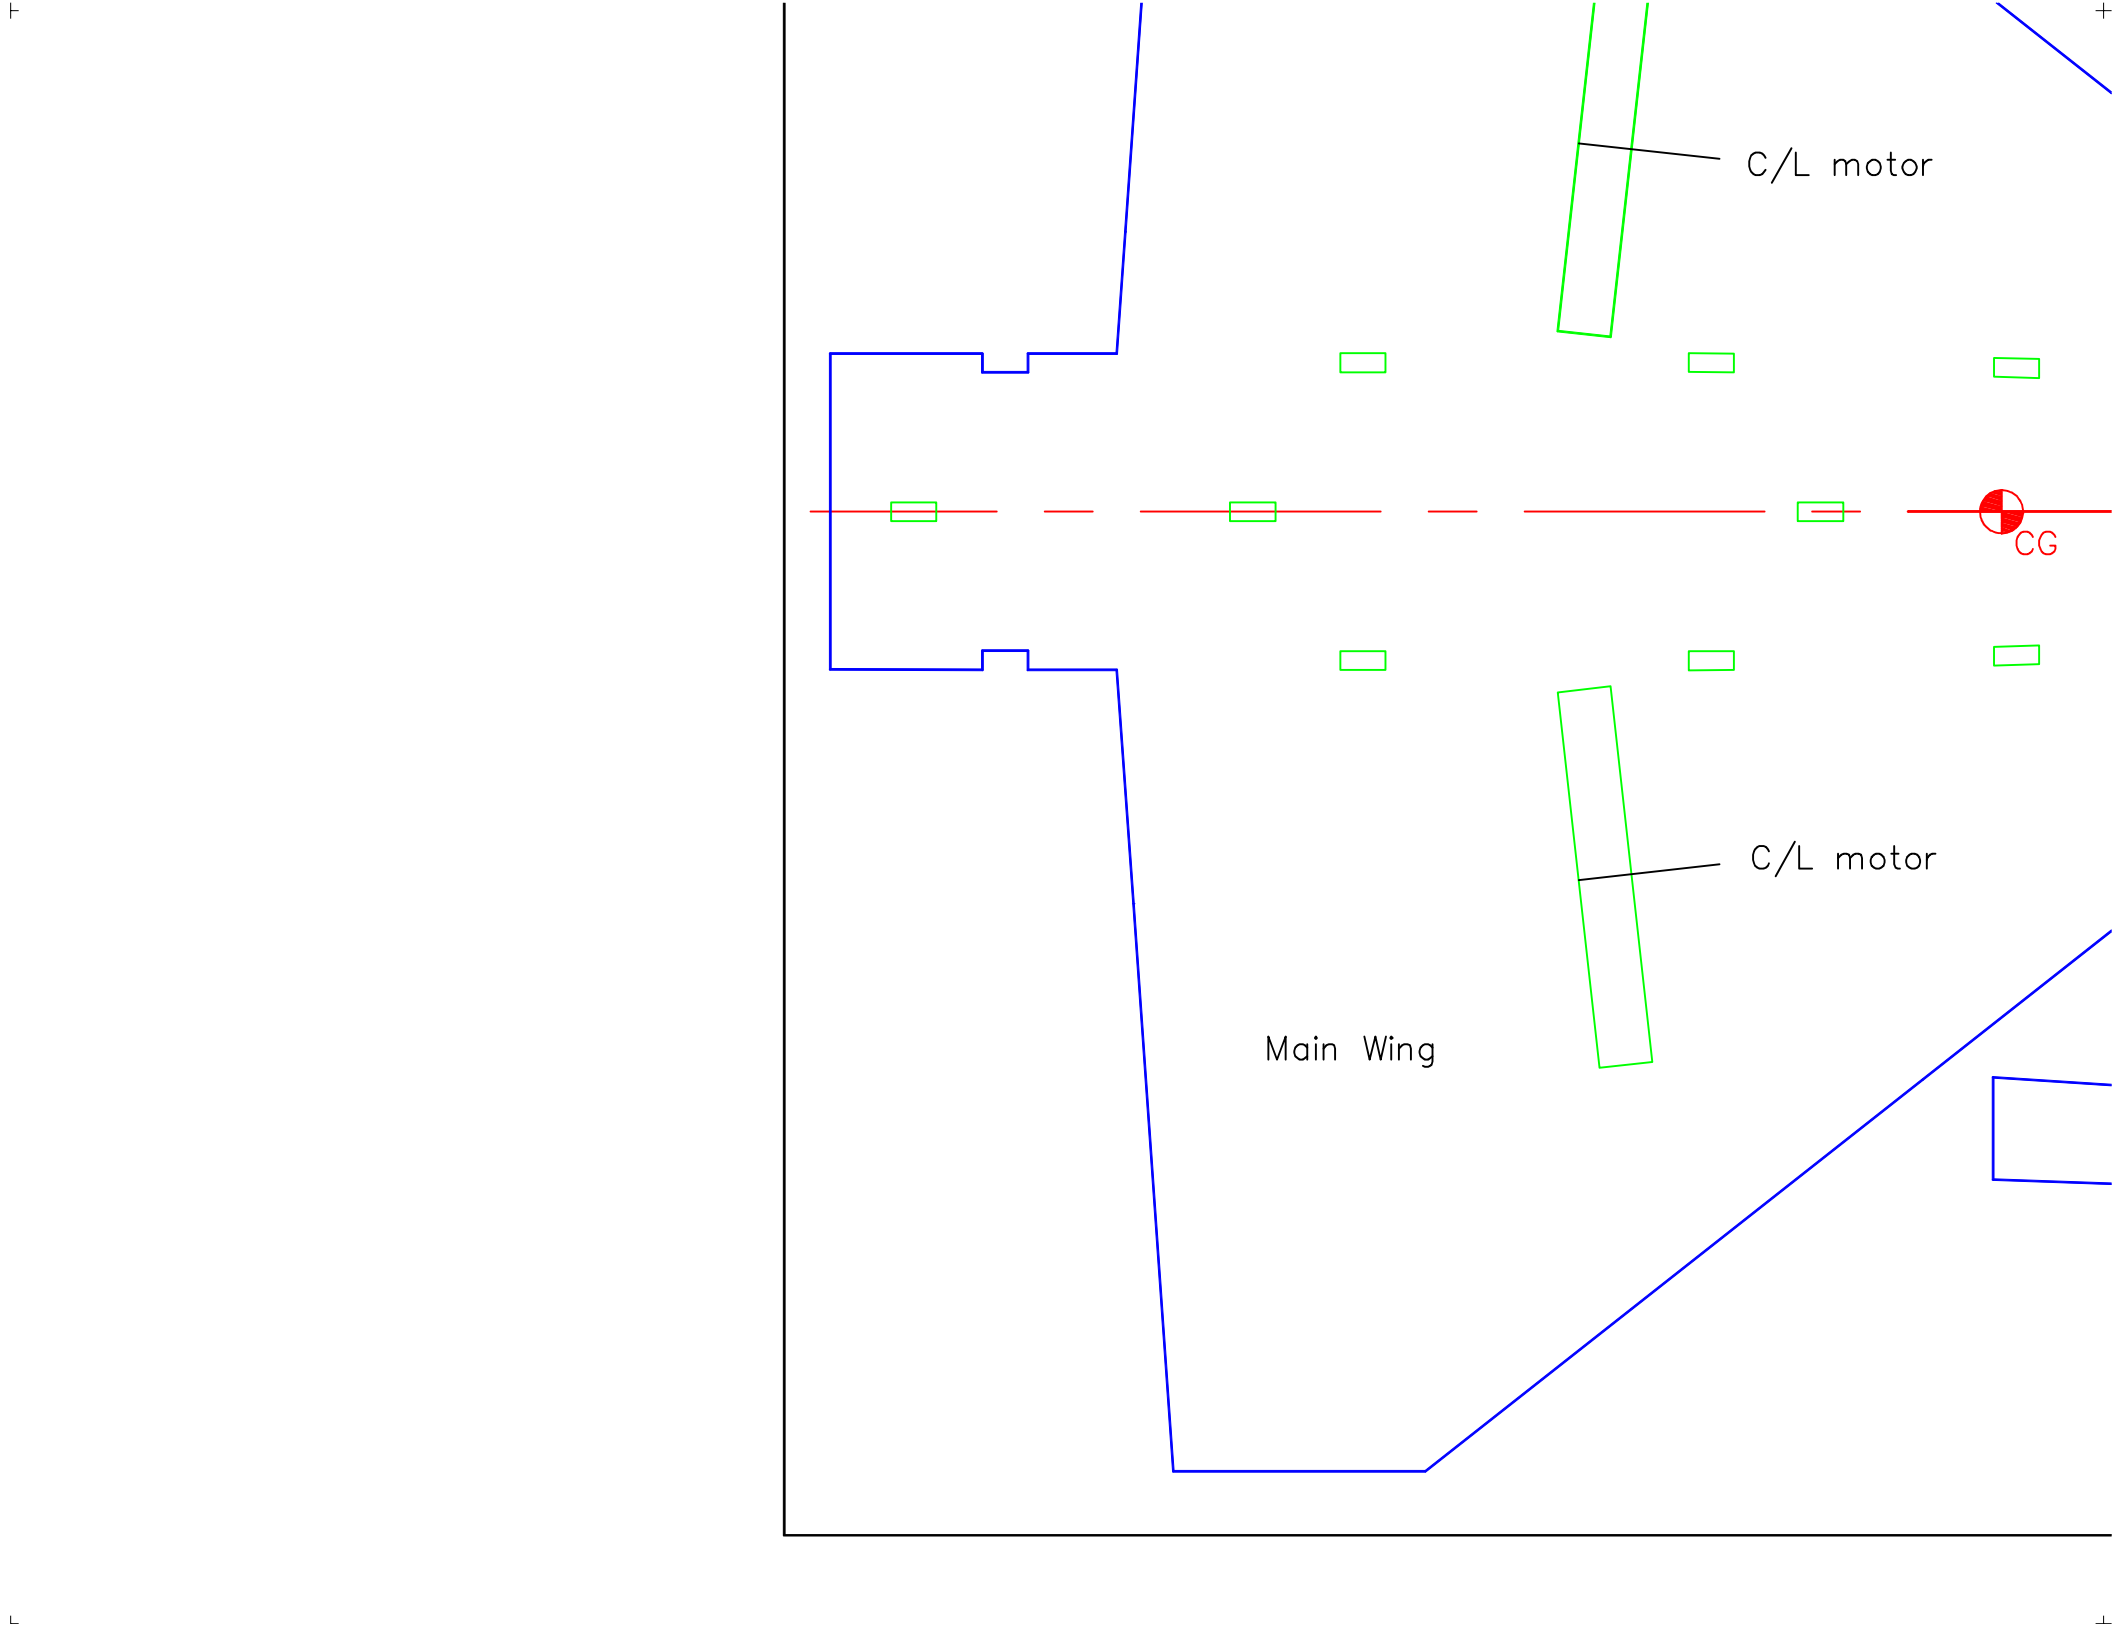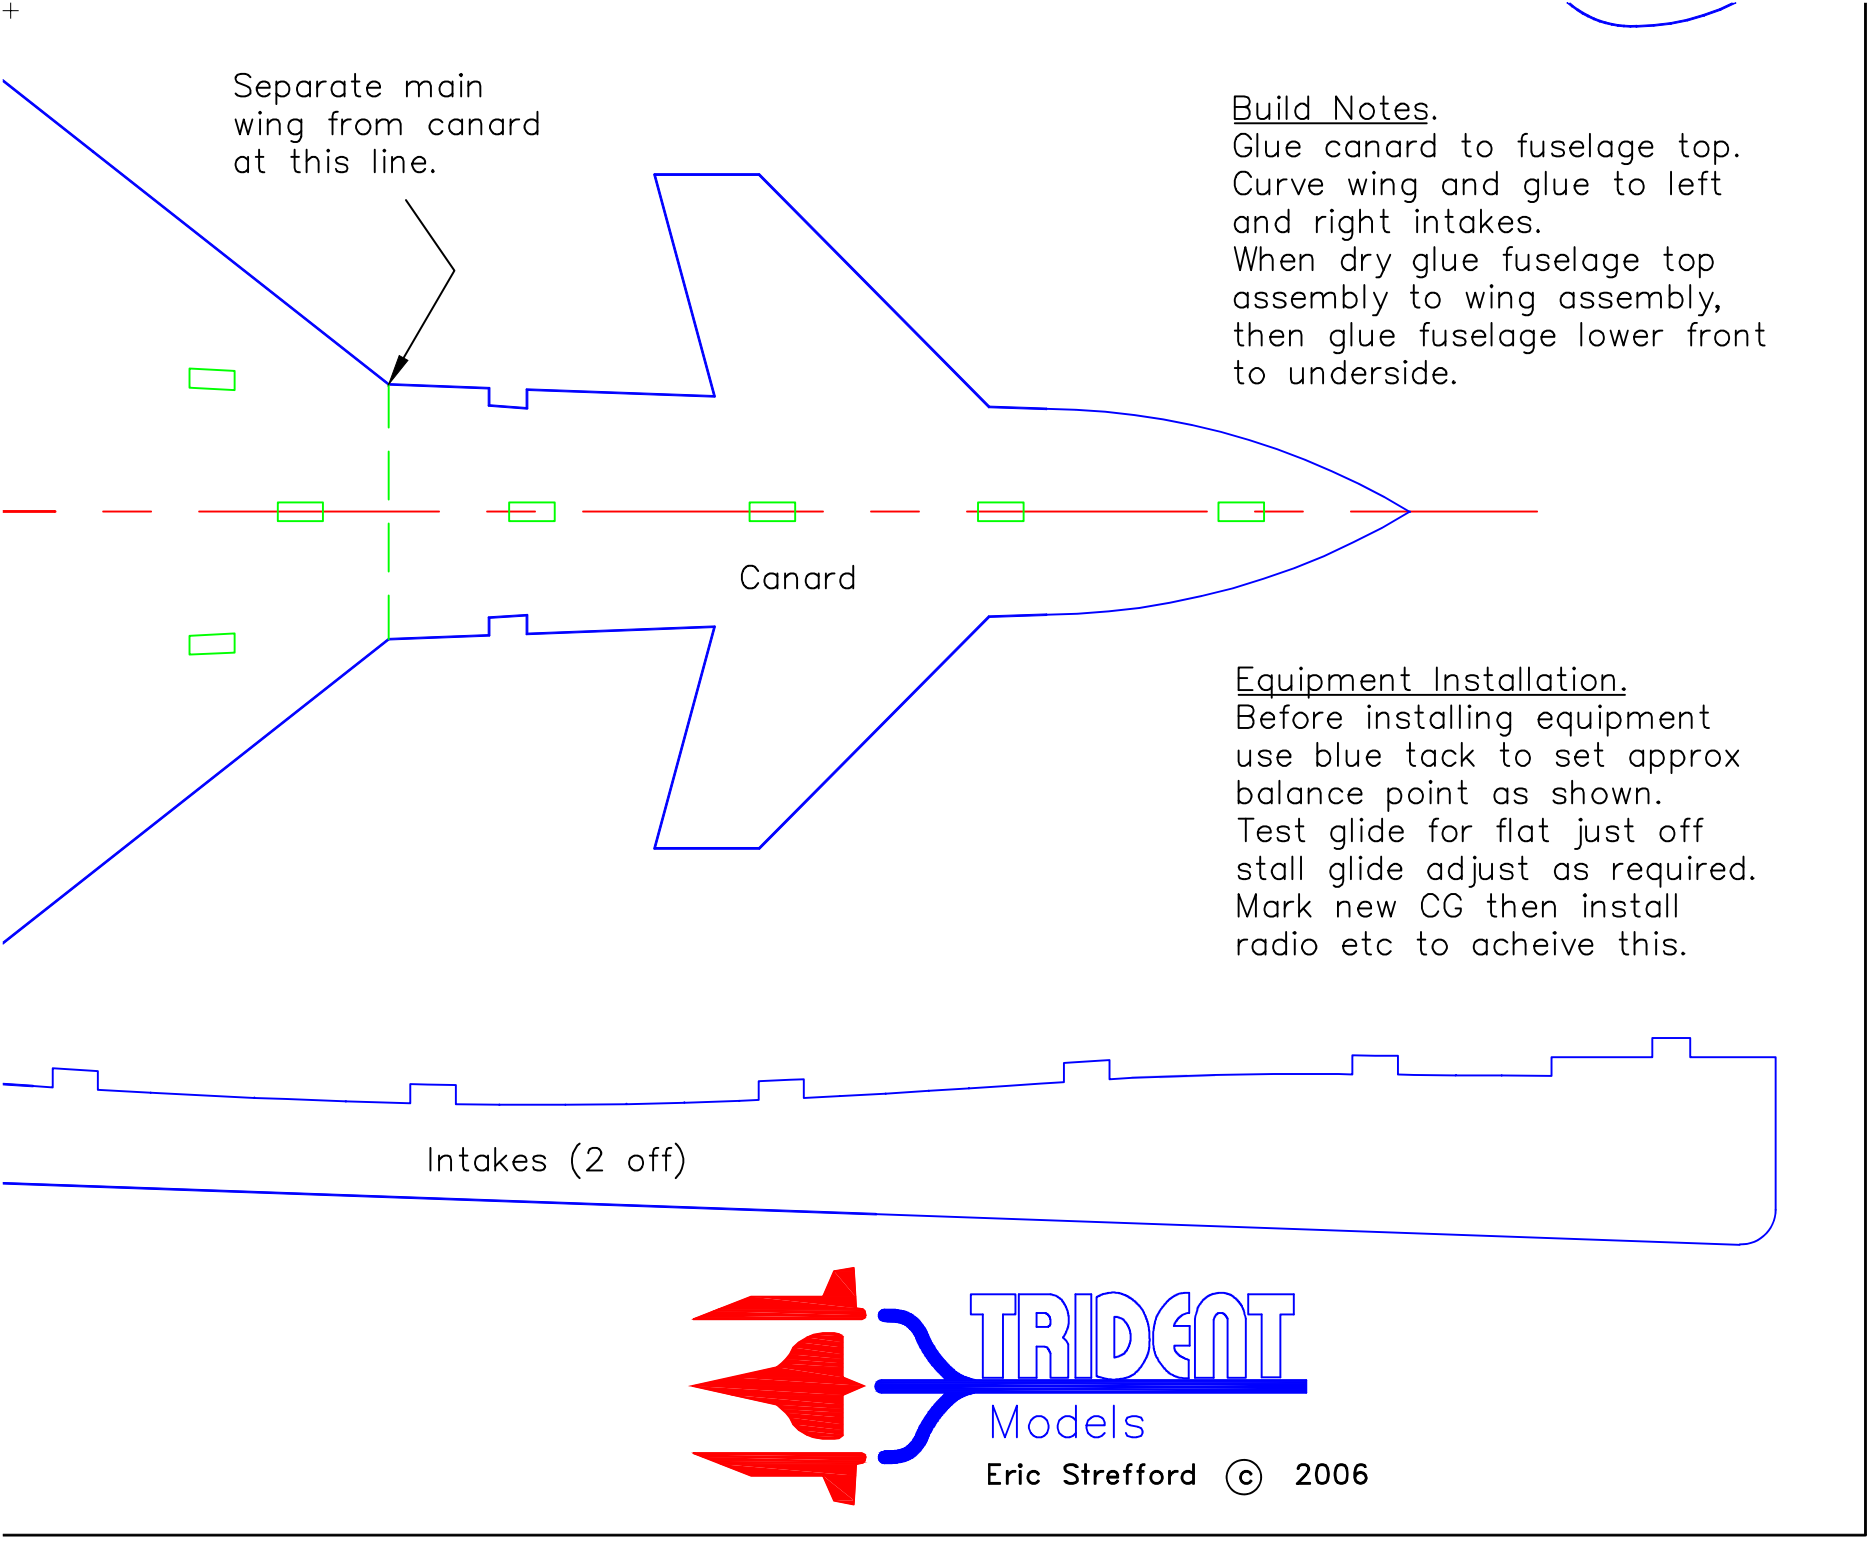



Build Notes.
Glue canard to fuselage top.
Curve wing and glue to left and right intakes.
When dry glue fuselage top assembly to wing assembly, then glue fuselage lower front to underside.

Equipment Installation.
Before installing equipment use blue tack to set approx balance point as shown.
Test glide for flat just off stall glide adjust as required.
Mark new CG then install radio etc to acheive this.

TRIDENT
Models

Eric Strefford © 2006

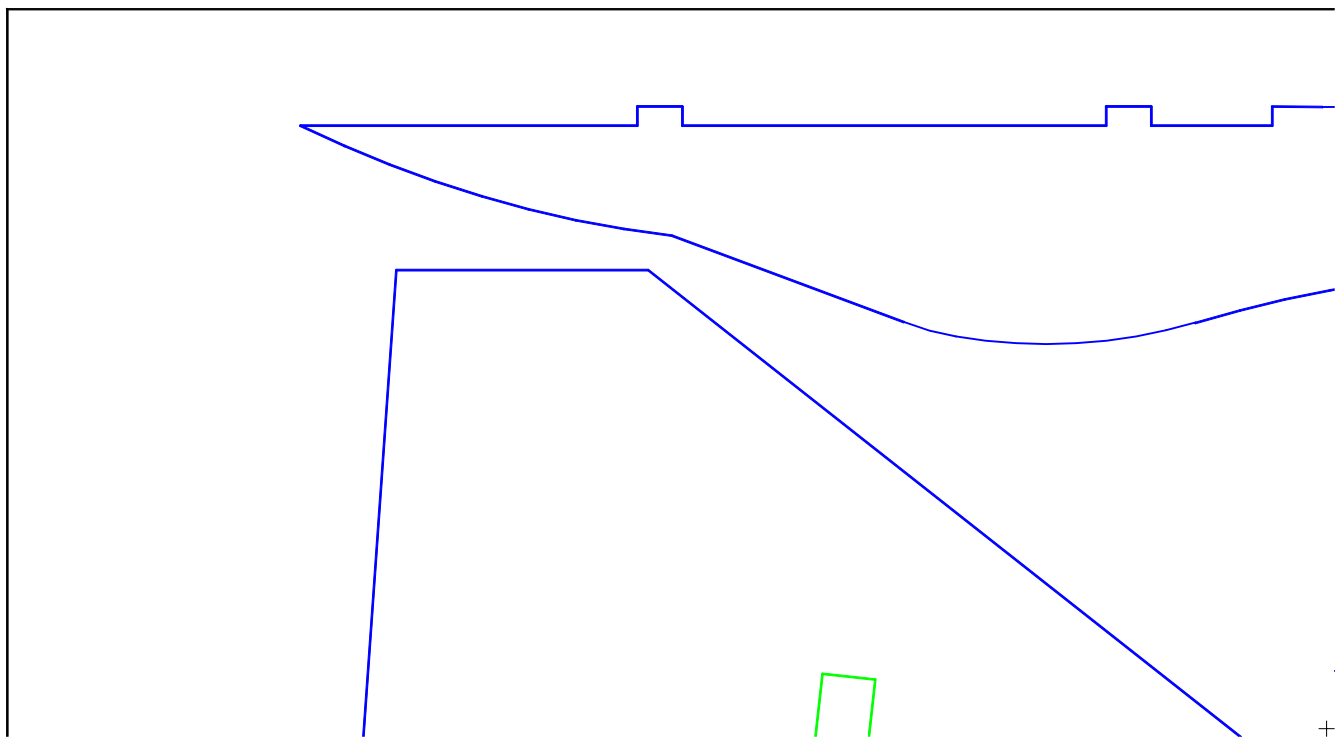

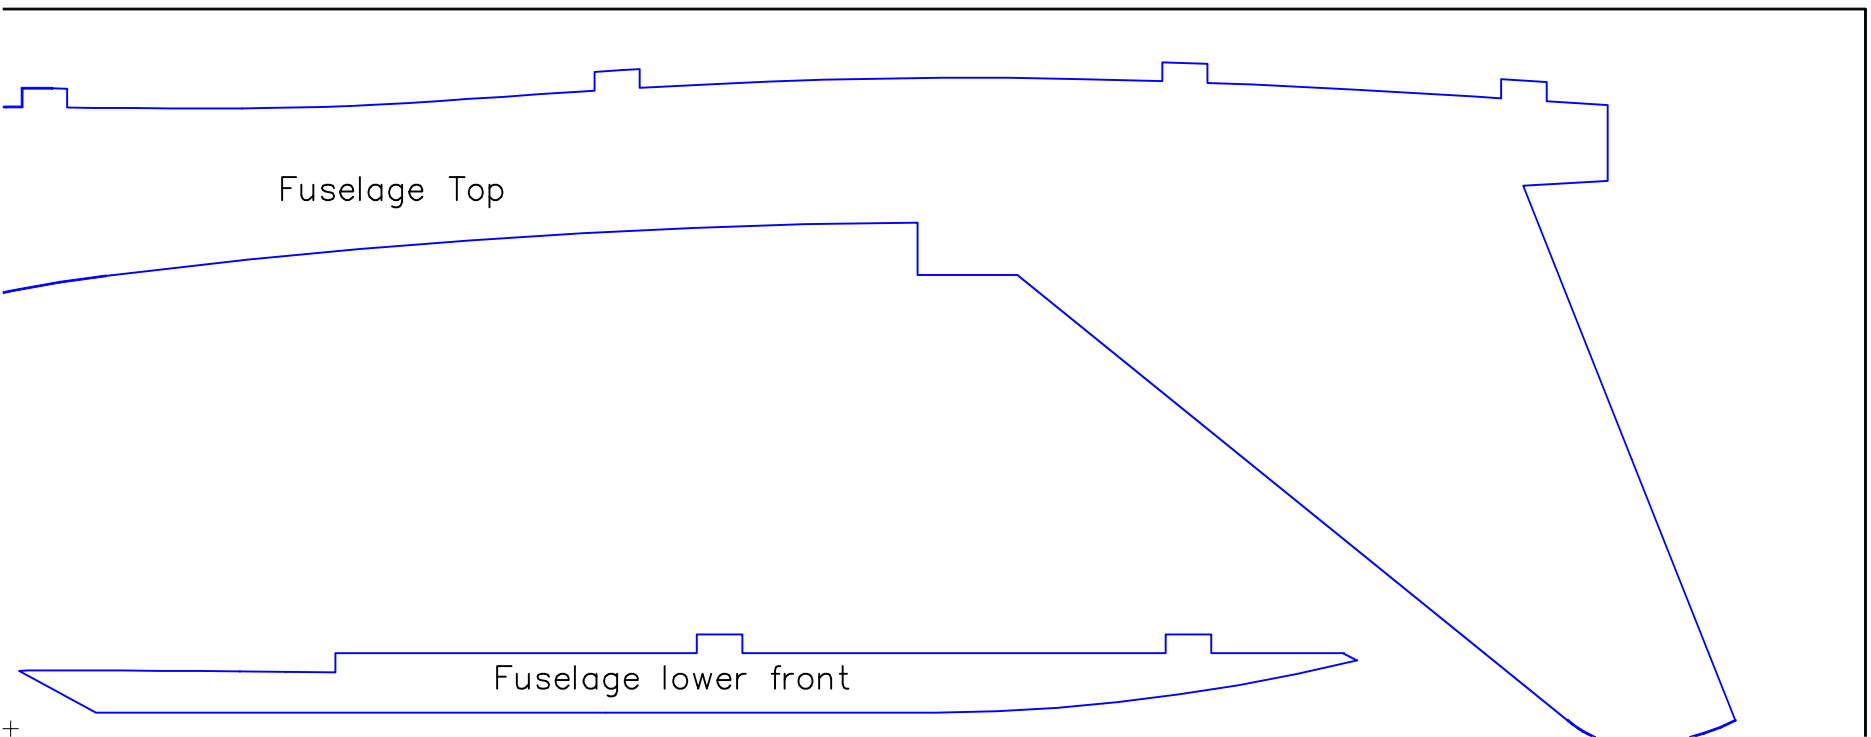
Fuselage Top
Fuselage lower front