
Project Name: X-Twin -TX
Date: MAR-11-05
Version: 1
Transmit frequency: 27.145MHz

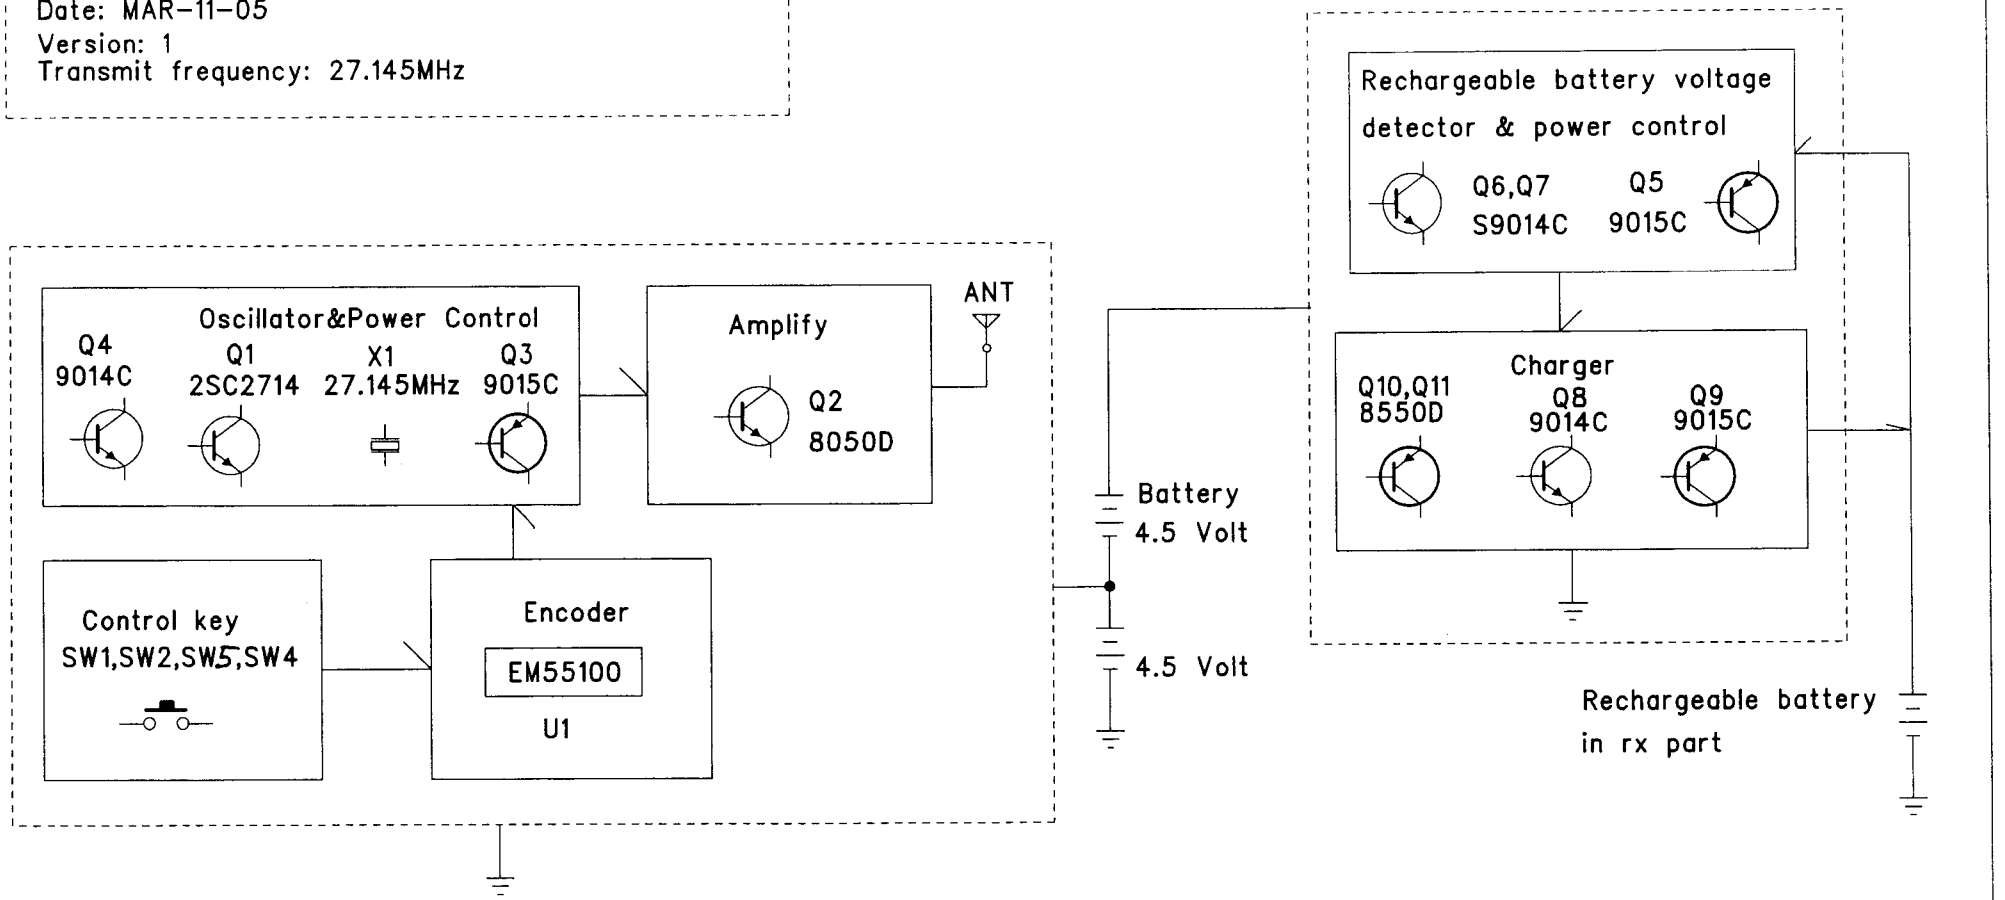

Technical description :

-Encoding signal will be generated by U1 ,a modulation signal will be generated by Q1 & Q3,and ampified by Q2.

-Modulating signal will be transmitted through antenna network.

-A rechargerable battery will be charged through Q10,Q11& automatic stopped when rechargeable battery voltage reach presetted voltage.

Silverlit® Silverlit Toys Manufactory Ltd. 1701-03, World Trade Centre, 280 Gloucester Road, Causeway Bay,Hong Kong.		DWG. NAME	Block diagram
ITEM NAME	X-Flying club: R/C Twin -TX		
27.145MHz		DRAWN/DATE	Agen/MAR-11-05
		CHK/DATE	Stanley/MAR-11-05
PAGE	1 OF 1	APP/DATE	Owen/MAR-11-05